




SP200 serie Thermisk flowswitch med Skibsgodkendelse

SP200 Compact type.
SP201 Extension type. Max 200mm
SP202 High Temperatur type. Max 120°C
SP220 Economy type.
SP210 Stainless Steel type.
SP170 ATEX version

SP serien er en flowswitch uden bevægelige dele.
 Den kan monteres både horizontal eller vertical.
 Følgende Application kan nævnes: Water power plant,
 HVAC system, Steel making, Petrochemical, Shipyard,
 Food process, cooling system and ect.

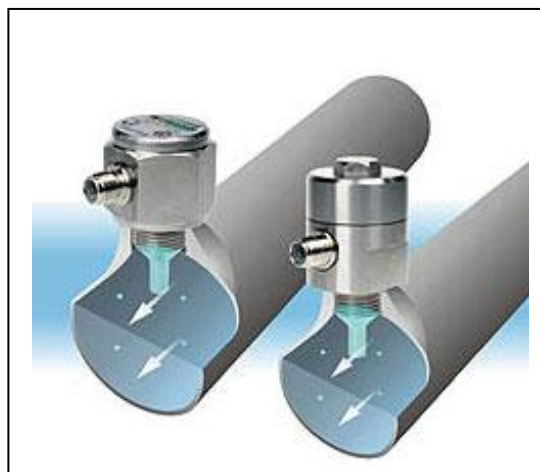

Tekniske data:

| | |
|----------------------------|--|
| Måleområde | Vand: 1~150 cm/s - Olie: 3~300 cm/s |
| Temperaturområde | -20~+120°C |
| Alarm output | NPN/PNP ($\leq 400\text{mA}$) Relæ NO/NC /SPST |
| Max tryk | 100 bar |
| Led indication | Red / Yellow / Green |
| Hus | SUS304 / SUS316 |
| Tæthedsklasse | IP67 |
| Warm-up tid | Ca 10 sec. |
| Process tilslutning | 1" / 3/4" / 1/2" 3/8" / 1/4" / PT/BSP/PF/NPT |
| Spænding | 19~30Vdc |
| Forbrug tomgang | max 50mA |
| Vægt | Ca 400g |
| Godkendelse | ATEX og skibsgodkendelse |
| Kabeltyper | PVC / PVDF / PTFE |