



Mini Float Level Switch



visit our website

PRODUCT INTRODUCTION

■ INTRODUCTION

The reed switch relies on two basic scientific principles namely: buoyancy and magnetism. Buoyancy causes the float (which contains a magnet) to rise with the liquid and magnetism helps open and close the switch.

Since this product's this product has been introduced to the market, it has seen significant improvement and advances with regards to convenience, safety and lowering costs.

The float switches are extremely compact, simple and are easy to install on any small locations.

These switches are not affected by electrical interference and can withstand chemicals, high temperatures and pressures if the correct material of float switch is selected.

■ LIQUID PROPERTIES AND FLOATS


The switch's float should always have a specific gravity (SG) less than the liquid that holds the float.

(SG float < SG liquid)

When the liquid level rises the float will rise up due to its buoyancy. The float's upward movement will actuate the switch and close the circuit.

Different float materials can be used to ensure the float's SG level is less than the liquid. (Water's SG level is 1 while gasoline SG levels tend to be less than 1).


Because the float switches are activated by the magnetic field inside the float, make sure the liquid contains no iron traces or substances that can induce magnetic interference.

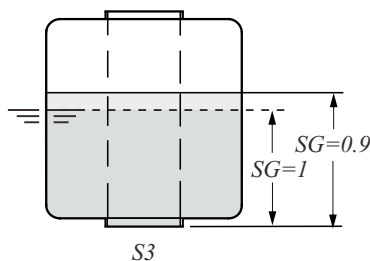

(Fig. 3)

■ WORKING PRINCIPLE


Fig. 1 illustrates the pivot activation (FCH Type reed switch). When float's magnet is moved close to the switch's stationary stem, the float magnet pushes the stem's switch circuit together and closes the electrical circuit. When the float magnet is moved away from the stem, the switch circuit separates and the circuit is opened.

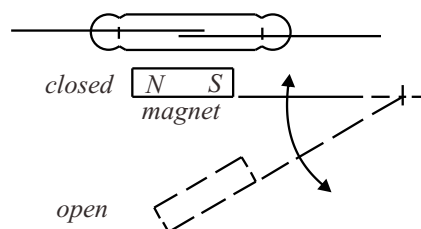

(Fig. 1)

Fig. 2 illustrates perpendicular activation (FC V TYPE float reed switches). When the liquid level rises and pushes the float up, the float's ring magnet (sealed in the float) moves close to the switch's stationary stem.

The magnet pushes the circuit together and when it makes contact, it closes the electrical circuit. When the float magnet moves away from the switch, the circuit contact is released and the switch is opened.

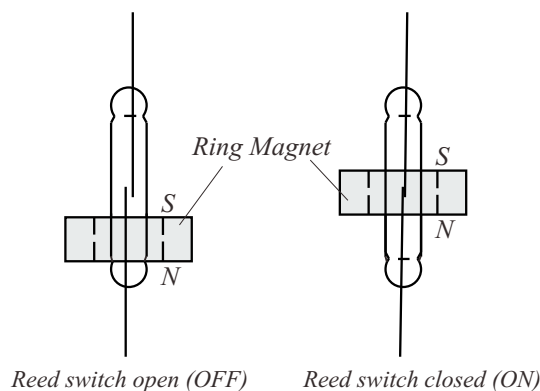

(Fig. 2)

CHEMICAL RESISTANCE

● Excellent ○ Good △ Fair × Corroded

Chemical	Concentration	Temp		Plastic				Rubber Stainless		
	%	°C	°F	PVC	PP	PVDF	PTFE	NBR	304	316
Ammonia Water NH_4OH	10	40	104	●	●	●	●	○		
	10	80	176		○	●	●			
Aque Regia $3\text{HCl}+\text{HNO}_3$	10	40	104	△	△	●	●			
	10	80	176			●	●			
Benzene C_6H_6	Pure	40	104	×	△	○	●			
		80	176			△	●			
Bleaching Liquor $\text{Ca}(\text{ClO})_2$	5	40	104	●		●	●			
	5	80	176			●	●			
	20	40	104	●		●	●			
	20	80	176			●	●			
Boric Acid H_3BO_3	Satu	40	104	●	●	●	●	●		
		80	176		●	●	●	○		
Brine		40	104	●	●	●	●	●		
		80	176		●	●	●			
Butadiene $\text{CH}_2=\text{CH}=\text{CH}=\text{CH}_2$	Gas	40	104	●		●	●			
		80	176			●	●			
Butane $\text{CH}_3(\text{CH}_2)_2\text{CH}_3$	Gas	40	104	●	●	●	●			
		80	176		●	●	●			
Nitric Acid HNO_3	10	40	104	●	●	●	●	●	●	●
	10	80	176	×	○	●	●		●	
	30	40	104	●	●	●	●		●	●
	30	80	176	×	○	●	●		●	●
	50	40	104	○	○	●	●		●	●
	50	80	176	×	×	○	●			
	70	40	104	○	×	●	●		○	●
	70	80	176	×		○	●			
	98	40	104			○	○			
	98	80	176				△			
Oxalic Acid HOOCCOOH	20	40	104	●	●	●	●	●		△
	20	80	176		●	●	●			
	50	40	104	●	●	●	●			△
	50	80	176		●	●	●			
Phosphoric Acid H_3PO_4	10	40	104	●	●	●	●	●	●	●
	10	80	176		○	●	●	△	●	●
	50	40	104	●	●	●	●	●	●	●
	50	80	176		△	●	●	×	●	●
	80	40	104	●	●	●	●	○	●	●
	80	80	176		△	●	●		●	●
Sodium Hydroxide NaOH	15	40	104	●	●	●	●	●	●	●
	15	80	176		○	△	●	△	×	×
	30	40	104	●	●	●	●	●	●	●
	30	80	176		○	△	●	●	×	×
	50	40	104	●	●	○	●	●	●	●
	50	80	176		○	×	●	●	×	×
	70	40	104	○	○	○	●			
	70	80	176		○	×	●			

Chemical	Concentration	Temp		Plastic				Rubber Stainless		
	%	°C	°F	PVC	PP	PVDF	PTFE	NBR	304	316
Sodium Hypochlorite NaClO	3	40	104	●	○	●	●		△	○
	3	80	176							
	5	40	104	●	○	●	●		△	○
	5	80	176							
	7	40	104	●	△	○	●		×	×
	7	80	176							
	10	40	104	●	△	●	●		×	×
	10	80	176							
Sulfuric Acid H_2SO_4	10	40	104	●	●	●	●	●	●	●
	10	80	176		●	●	●	○	○	○
	30	40	104	●	●	●	●	●	×	×
	30	80	176		●	●	●	○	×	×
	50	40	104	●	●	●	●	○	×	×
	50	80	176		●	●	●	△	×	×
	60	40	104	●	●	●	●	●	×	×
	60	80	176		○	●	●	○	×	×
	70	40	104	●	●	●	●	○	×	×
	70	80	176		○	●	●	△	×	×
Toluene $\text{C}_6\text{H}_5\text{CH}_3$	40	40	104		△	△	●			
	80	80	176				○			
Chlorine Gas Cl_2	Wet	40	104	○		●	●			
	Wet	80	176			△	●			
	Dry	40	104	●		●	●			
	Dry	80	176			●	●			
Chromic Acid H_2CrO_4	10	40	104	●		●	●			
	10	80	176			●	●			
	20	40	104	△		●	●			
	20	80	176			●	●			
	40	40	104	△		●	●			
	40	80	176			●	●			
	50	40	104	×		●	●			
	50	80	176			△	●			
Hydrochloric Acid HCl	15	40	104	●	●	●	●	○		
	15	80	176		●	●	●			
	25	40	104	●	●	●	●	×		
	25	80	176		●	●	●			
	35	40	104	●	●	●	●	×		
	35	80	176		○	●	●			
	38	40	104	●	●	●	●	×		
	38	80	176		○	●	○			

● Excellent ○ Good △ Fair × Corroded

Chemical	Concentration	Temp		Plastic				Rubber	Stainless	
	%	°C	°F	PVC	PP	PVDF	PTFE	NBR	304	316
Citric Acid $C_6H_8O_7$	10	40	104	●	●	●	●	●	●	●
	10	80	176		○	●	●	●		
Gasoline	10	40	104	●		●	●			
	10	80	176			●	●			
Diesel Fuels		40	104			●	●		●	●
		80	176			●	●		●	●
Ethyl Alcohol C_2H_5OH	Pure	40	104	●	●	●	●	●	○	○
		80	176		○	●	●	○		
Formic Acid $HCOOH$	90	40	104	○	○	●	●			
		80	176			●	●			
Hydrofluoric Acid HF	Dilute	40	104	●	○	●	●			
	Dilute	80	176		○	●	●			
	30	40	104	○	○	●	●			
	30	80	176	×	○	●	●			
	40	40	104	△	○	●	●			
	40	80	176		○	●	●			
	50	40	104	△	○	●	●			
	50	80	176		○	●	●			
Hydrogen peroxide H_2O_2	5	40	104	●	●	●	●		○	●
	5	80	176		○	●	●			
	20	40	104	●	●	●	●			
	20	80	176		○	●	●			
	30	40	104	○	○	●	●			
	30	80	176		△	●	●			
	50	40	104	△	×	●	●			
	50	80	176			●	●			
	90	40	104			●	●			
	90	80	176			●	●			
Isopropyl Alcohol $(CH_3)_2CHOH$	Pure	40	104	●	●	●	●	○		
		80	176			●	●			
Kerosene		40	104	●	○	●	●			
		80	176			●	●			
Methyl Alcohol CH_3OH		40	104	○	●	●	●	△		
		80	176		○	●	●			
Methyl Ethyl Ketone $CH_3COC_2H_5$		40	104		△		●			
		80	176				●			
Potassium Chromate K_2CrO_4		40	104	●	●	●	●	●		
		80	176		○	●	●	○		

REED SWITCH PROTECTION

■ INDUCTIVE LOADS

When using reed switches for inductive loads such as motors, relay coil, solenoids, etc., the contact points will sometimes be subjected to high voltages. Such high induced voltages may damage the reed switch or significantly reduce its life.

Therefore, circuit protectors such as: RC snubbers, varistors or clamping diodes are recommended. (see Fig. 4a, Fig. 4b, Fig. 4c)

- Do not directly connect the solenoid valve, motor or magnetic switch.

$$C = \frac{I^2}{10} \text{ (uF)}$$

$$R = \frac{E}{10I(1 + \frac{E}{50})}$$

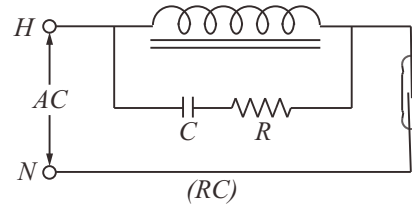


Fig. 4 (a)

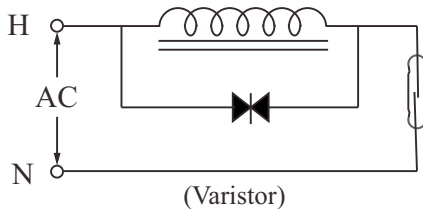


Fig. 4 (b)

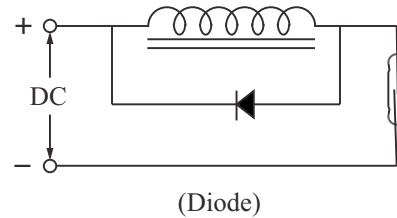


Fig. 4 (c)

■ CAPACITIVE LOADS

When using reed switches for capacitive loads such as capacitors, incandescent lamps or long cables, the contact points will be subjected to electrical surges. Therefore, protective circuits such as: surge suppressors or current limiting resistors are recommended. (Fig. 5a, Fig. 5b)

Therefore, circuit protectors such as: RC snubbers, varistors or clamping diodes are recommended (Fig. 5a, Fig. 5b)




Fig. 5 (a)

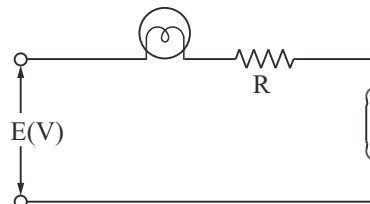








Fig. 5 (b)

FLOAT SPECIFICATIONS


MODEL	TYPE	$\phi A \times B \times \phi C$	S.G.	Max. Pressure (kg/cm ²)	Weight (g)	Material/Color	Max. Temp. (°C)
	S1	28x28x9.5	E>0.7	10	8	SUS 304 / 316L	200
	S3	45x55x15	E>0.65	12	37.6	SUS 316	200
	S6	75x108x20	E>0.5	10	165	SUS 304	200
	S13	38x50x15	E>0.62	12	22.9	SUS 316L	200
	S2	41x38x11	E>0.7	35	19.5	SUS 316	200
	S4	52x52x15	E>0.55	30	33.4	SUS 316	200
	S5	75x73x20	E>0.7	30	102.4	SUS 316	200
	S7	30x28x9.5	E>0.82	25	8	SUS 304 / 316L	200
	S8	100x100x20	E>0.5	15	249.7	SUS 304	200
	S9	150x150x30	E>0.45	15	534	SUS 304	200
	S11	28x32x9.5	E>0.82	30	8.1	SUS 316	200
 (Hollow)	P1	25x15x10	E>0.65	4	3.5	PP / white black	80
	P2	25x25x10	E>0.55	4	5	PP / white black	80
	P3	48x45x18.5	E>0.6	5	35.5	PP / black	80
	P4	20x25x10	E>0.7	4	3.7	PP / white black	80
	P5	20x20x8.1	E>0.75	4	4	PP / white	80
	P8	18.2x15.3x7.2	E>0.8	4	1.82	PP / black	80
 (Foam)	Q6	20x20x7.5	E>0.75	ATM	3.5	PP / white	80
	Q7	25x25x8.8	E>0.7	ATM	6.7	PP / white	80
	N1	25x15x10	E>0.5	ATM	2.7	NBR / black	100
	N2	18.5x26x10	E>0.7	ATM	3.3	NBR / black	100
	N3	19x20x10	E>0.55	ATM	2.4	NBR / black	100
	N4	17.5x25x10	E>0.65	ATM	2.5	NBR / black	100
	N5	30x45x12.8	E>0.5	ATM	11.5	NBR / black	100
 (Hollow)	F2	42x44x14	E>0.63	5	18.5	PP	80
	F3	45x45x20	E>0.65	5	35.7	PP	80
	F4	48x62x18	E>0.8 5	5	65.3	PVDF	120

STAINLESS STEEL SWITCHES


► FD MH50/ 56

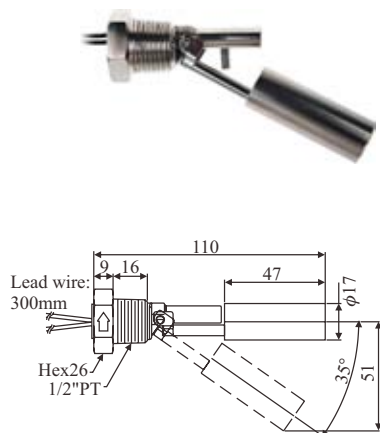


► FD MH50A /56A

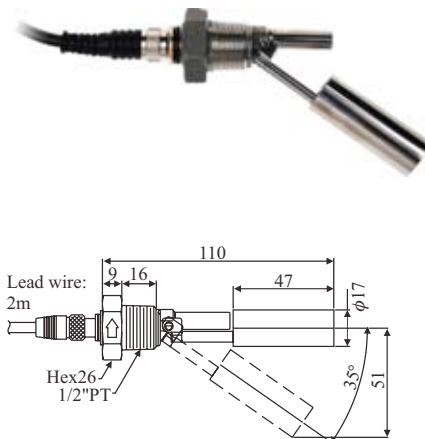


► FD MH50C /56C

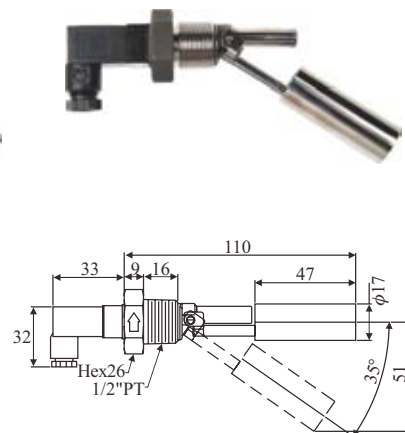


► FD MH60/ 66

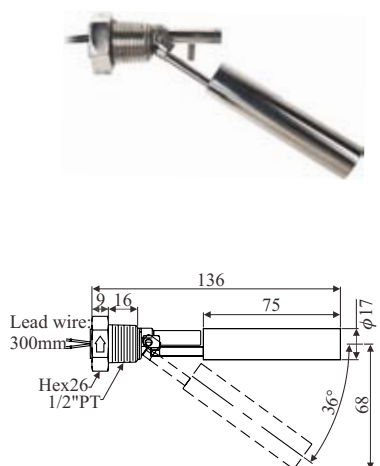

► FD MH60A/ 66A

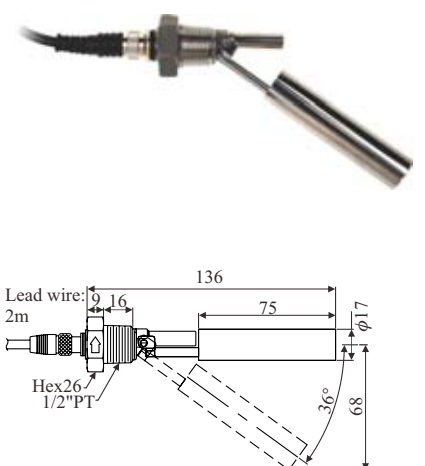

► FD MH60C/ 66C

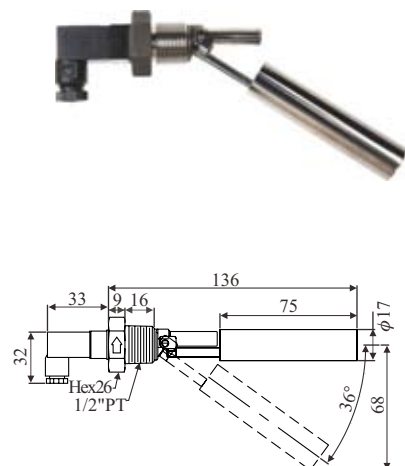

■ SPECIFICATIONS


Type	Material	Switching Capacity Max.	Switching Voltage Max.	Switching Current Max.	Carry Current Max.	Lead Wire	Max. Pressure	Operating Temp.	Suitable Sp. Gr.
FDMH50/56 FDMH60/66	SUS 304 SUS 316L	50W/SPST	240Vac 200Vdc	0.5A	1A	XLPE or TEFLON	5 kg/cm ²	-20~120°C (Max.200°C)	FDMH5:0.92 FDMH6:0.75
FDMH50A/56A FDMH60A/66A	SUS 304 SUS 316L	50W/SPST	240Vac 200Vdc	0.5A	1A	XLPE or TEFLON	5 kg/cm ²	80°C	FDMH5:0.92 FDMH6:0.75
FDMH50C/56C FDMH60C/66C	SUS 304 SUS 316L	50W/SPST	240Vac 200Vdc	0.5A	1A	XLPE or TEFLON	5 kg/cm ²	-20~120°C	FDMH5:0.92 FDMH6:0.75

HOW TO ORDER SINGLE SWITCHES


	FDMH	5	0	A	B	R	(	0	5	)	F
Type											
	5: ϕ 17x47L (SG: 0.92) 6: ϕ 17x75L (SG: 0.75)										
Material											
	0: SUS304 6: SUS316L										
Connection											
	- : without A: M12 C: DIN										
	※ Connector M12 whose standard wire length is 2M										
	※ Connector M12 whose wire is endurable with oil and made of PVC / PUR, Max.Temp: 80°C										
Connecting Type											
	BR:1/2"PF BQ: 1/2"PT BU: 1/2"NPT BT: 1/2"BSP										
Lead wire Length (Unit=100mm)											
	05: 500mm (below 500mm) ※ 500mm per Unit										
	10: 1000mm (501~1000mm) ※ 300mm (Standard length)										
	15: 1500mm (1001~1500mm)										
	⋮										
Material of Lead wire											
	F: SILICON (150°C) AWG24 X ϕ 4										
	T: TEFLON (200°C) AWG24										
	X: XLPE (125°C) AWG22 (Standard)										
	※ Material of Wetted parts"SUS304" ◦										

MARINE LEVEL SWITCHES


► FDMRN5A0B

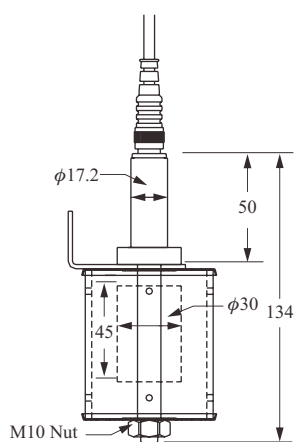


► FDMRN5B0B

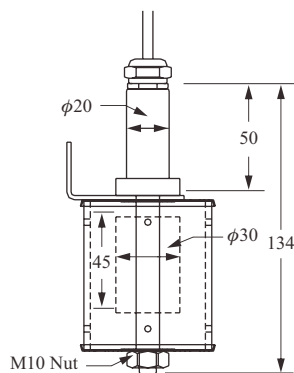

► FDMRN5C0B

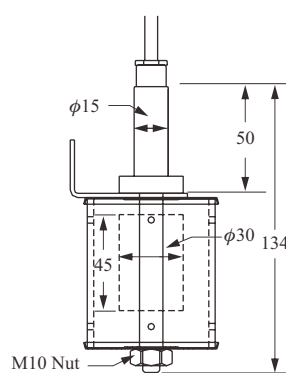

► FDMRN5D0B

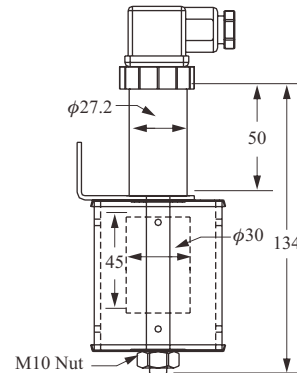


■ SPECIFICATIONS


Type	Material	Switching Capacity Max.	Switching Voltage Max.	Switching Current Max.	Carry Current Max.	Lead Wire	Max. Pressure	Operating Temp.	Suitable Sp. Gr.
FDMRN5A0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	M12, 2 meter	ATM	Max. 80°C	0.5
FDMRN5B0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	PVC,22 AWG	ATM	Max. 80°C	0.5
FDMRN5C0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	Silicon	ATM	Max. 100°C	0.5
FDMRN5D0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	DIN 43650	ATM	Max. 80°C	0.5

MARINE LEVEL SWITCHES


► FDMRN8A0B

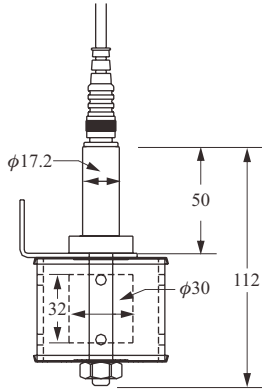


► FDMRN8B0B



► FDMRN8C0B







► FDMRN8D0B



■ SPECIFICATIONS

Type	Material	Switching Capacity Max.	Switching Voltage Max.	Switching Current Max.	Carry Current Max.	Lead Wire	Max. Pressure	Operating Temp.	Suitable Sp. Gr.
FDMRN8A0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	M12, 2 meter	ATM	Max. 80°C	0.7
FDMRN8B0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	PVC,22 AWG	ATM	Max. 80°C	0.7
FDMRN8C0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	Silicon	ATM	Max. 100°C	0.7
FDMRN8D0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	DIN 43650	ATM	Max. 80°C	0.7

■ FDB-0450 PARTS OF SLOSH SHIELD



Acrylic cover

HOW TO ORDER MARINE LEVEL SWITCHES

FDMR **N** **5** **A** **0** **B** **(05)**

Float Type

N5: $\phi 30 \times 45L$ (NBR) N8: $\phi 30 \times 32L$ (NBR)

Connection Type

A: M12 B,C: Cable D: DIN Connection

※ Connector M12 whose standard wire length is 2M

※ Connector M12 whose wire is endurable with oil and made of PVC / PUR, Max.Temp: 80°C

Tube Material

0: SUS304, 6: SUS316L

Contact Form

A: Normal open (N.O.)

B: Normally closed (N.C.)

Lead wire Length (L)

05: 500mm (01~500mm)

※ 500mm per Unit

10: 1m (501mm~1m)

※ 300mm (Standard length)

15: 1.5m (1.01~1.5)

※ 2M is standard length of lead wire for ASI connection

⋮


FDMRN5□A0

FDMRN5□B0


FDMRN5□C0

FDMRN5□D0


FDMRN8□C0

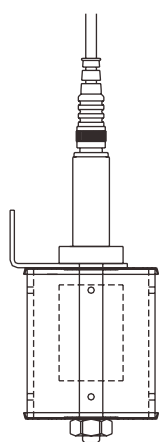


A TYPE

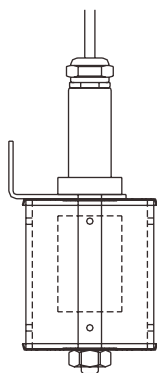


B TYPE

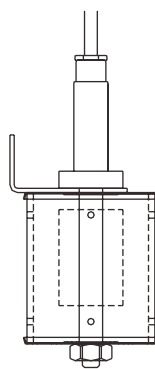

C TYPE

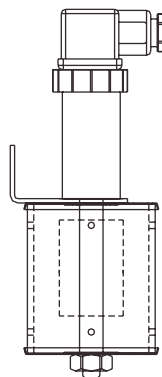



D TYPE



C TYPE


STAINLESS STEEL MODELS

► FD 30□1/ FD 35□1

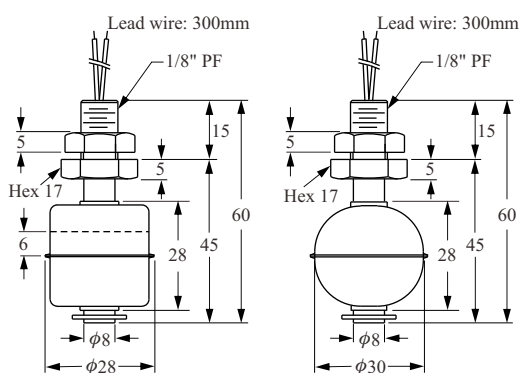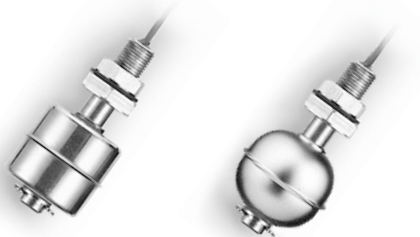


Washer: NBR
Drill hole φ10mm

► FD 40□1

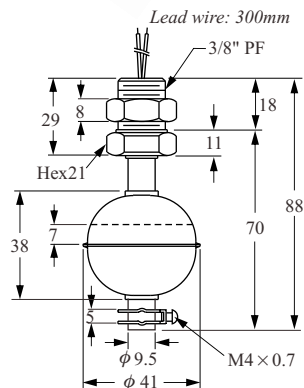


Washer: NBR
Drill hole φ17mm

► FD 45□1

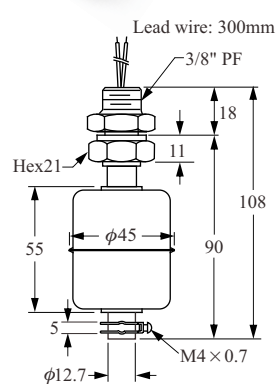


Washer: NBR
Drill hole φ17mm

► FD 30□2

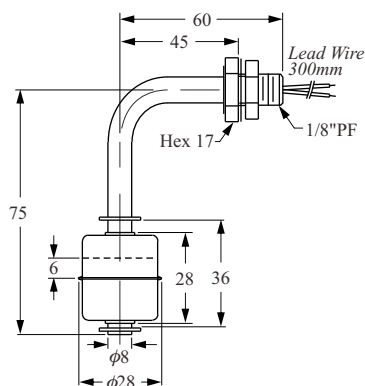


Washer: NBR
Drill hole φ10mm

► FD 40□2

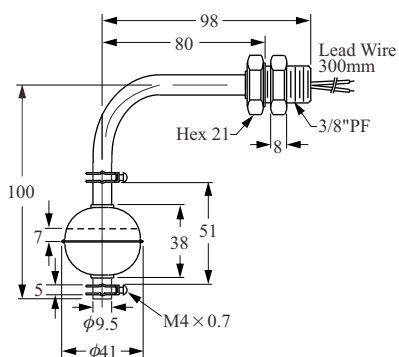

Washer: NBR
Drill hole φ17mm


► FD 45□2

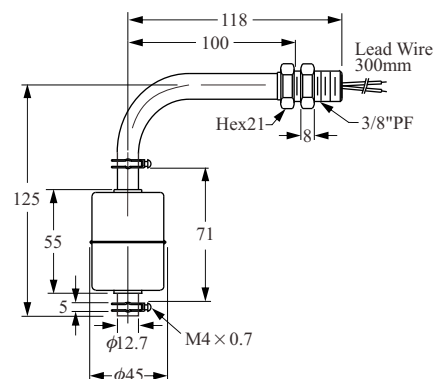

Washer: NBR
Drill hole φ17mm


METAL TYPES

► FD 50□1

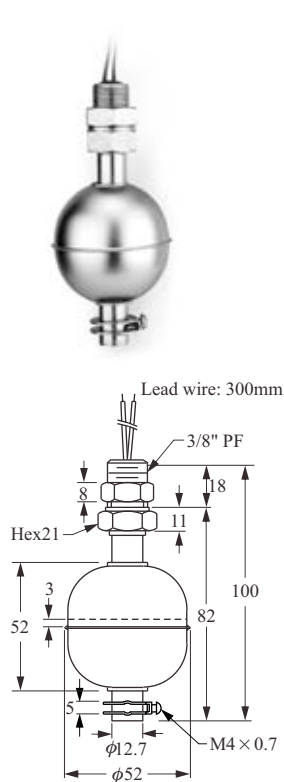


Washer: NBR
Drill hole φ17mm

► FD 50□2

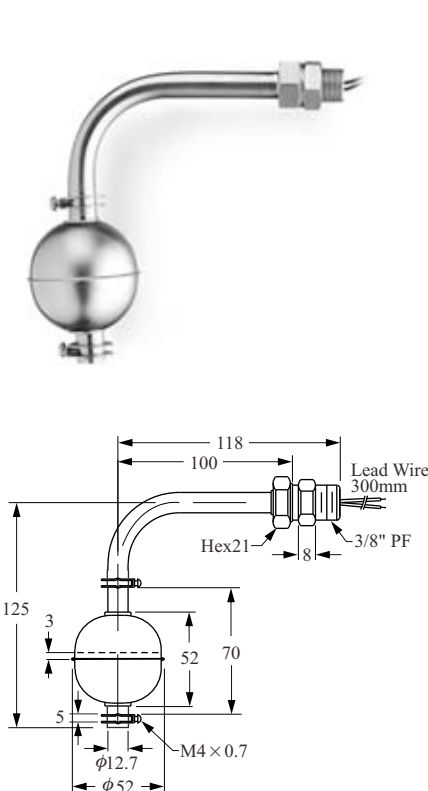

Washer: NBR
Drill hole φ17mm

► FD 75□1

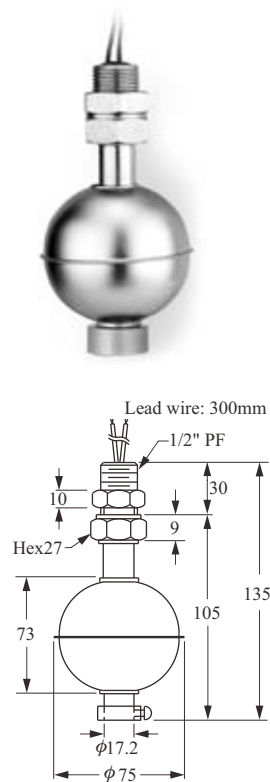

Washer: NBR
Drill hole φ21mm

■ SPECIFICATIONS

Type Description	FD30□1D FD30□2D	FD40□1D FD40□2D	FD45□1D FD45□2D	FD50□1D FD50□2D	FD75□1G	FD10□1G
Switching Capacity Max.	50W SPST	50W SPST	50W SPST	50W SPST	60W SPDT	
Switching Voltage Max.	240Vac/200Vdc				220Vac	
Switching Current Max. (A)	0.5A	0.5A	0.5A	0.5A	1A	
Carry Current Max. (A)	1A	1A	1A	1A	2A	
Lead Wire	XLPE (UL3266, AWG22)					
Reversible Switch Action	YES / below 80°C, NO / UP 80°C				NO	NO
Max. Pressure (Kg/cm ²)	10	30	12	30	30	10
Operating Temperature	-20~120°C (OPTION 200°C)					
Material	Stainless Steel SUS304, 316					
Suitable Specific Gravity	0.7	0.7	0.65	0.55	0.55	0.5

ORDERING METAL SWITCHES

FD **30** **6** **2** **D** **A** **(10)** **H**

Order No./ Model

10 Float : $\phi 75 \times 108$, Screw : 1/2"PF
 30 Float : $\phi 28 \times 28$, Screw : 1/8"PF
 31 Float : $\phi 28 \times 28$, Screw : 1/8"NPT
 35 Float : $\phi 30 \times 28$, Screw : 1/8"PF
 36 Float : $\phi 30 \times 28$, Screw : 1/8"NPT
 40 Float : $\phi 41 \times 38$, Screw : 3/8"PF
 45 Float : $\phi 45 \times 55$, Screw : 3/8"PF
 50 Float : $\phi 52 \times 52$, Screw : 3/8"PF
 75 Float : $\phi 75 \times 70$, Screw : 1/2"PF

Material of Wetted parts

0 : SUS304
 6 : SUS316

Mounting

1 : Top or Bottom Mounting
 2 : Side Mounting

Switching Capacity Max.

D: 50W 240Vac /200Vdc SPST 
 F: 10W 125Vac SPST
 G: 60W 220Vac SPDT (only use for tube $\phi 17.2$)
 S: Others

Contact Mode

A: Normally Open (N.O.) SPST ※ High Temperature only available for A or B Type
 B: Normally Closed (N.C.) SPST
 C: 1C SPDT
 D: N.C. Reversible
 E: N.O. Reversible

Lead wire Length (Unit=100mm)

05: 500mm (below 500mm) ※ 500mm per Unit
 10: 1000mm (501~1000mm) ※ 300mm (Standard length)
 15: 1500mm (1001~1500mm)

⋮


Material of Lead wire

B: PVC cable (80°C) ---- AWG24
 C: PVC cable (80°C) ---- AWG22 X $\phi 4$ ※ $\phi 8$ Stem is not suitable.
 D: XLPVC (105°C) ---- AWG22
 F: SILICON cable (150°C) ---- AWG24 X $\phi 4$
 P: PVC (80°C) ---- AWG22
 T: TEFLON (200°C) ---- AWG24
 X: XLPE (125°C) ---- AWG22 (Standard)


High Temp. (200°C)

PLASTIC OH MODELS

► FCH11QD

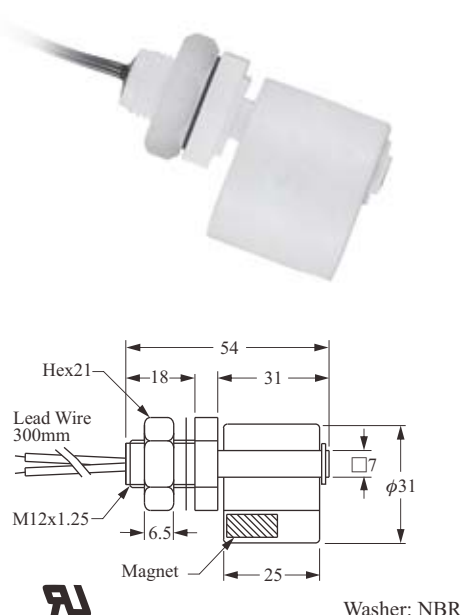


■ Installation / N.C./ N.O. Action Position

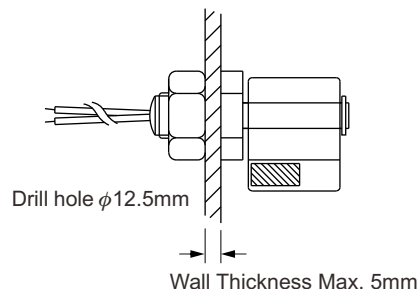

Normally open
N.O.

Normally closed
N.C.

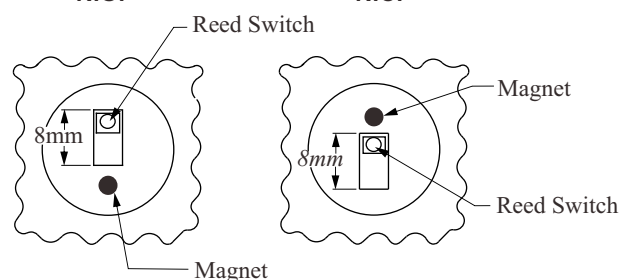

- All the products in this range come with UL E161587 approval.
- All the products in this range are designed to be side mounted.
- Water's specific gravity is used as the reference point for calculations.

■ SPECIFICATIONS

Description \ Type	FCH11QD	FCH21PD FCH31PD	FCH23FD FCH33FD	FCH24YD FCH34YD	FCH25GD FCH35GD
Switching Capacity Max.	50W SPST				
Switching Voltage Max.	240VAC / 200Vdc				
Switching Current Max. (A)	0.5A				
Carry Current Max. (A)	1A				
Lead Wire	PVC AWG22	XLPE AWG22			
Max. Pressure (Kg/cm ²)	ATM	4 kg/cm ²	2 kg/cm ²		
Operating Temperature	-20~80°C		-20~120°C		
Material	PP		PVDF	Nylon	Polysuphone
Suitable Specific Gravity	0.6	0.65	0.85	0.8	0.85
Weight	25 g	H21: 22 g H31: 21 g	25 g	23 g	25.4 g


PLASTIC OH MODELS

► FC H21PD / H31PD




- FCH2 and FCH3 models are available in PP, Nylon, and PVDF.
- Special lead wire/cable are available on request.
- Different reed switches are available for selection.
- For standard design specifications see catalog (p14).
- OEM designs are welcome.

■ Optional FC H21PDO(Round)

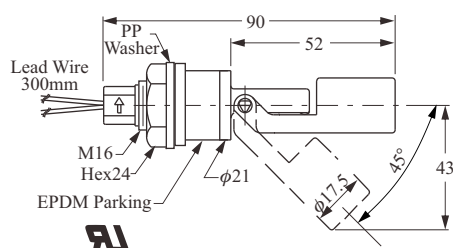


■ Installation / N.C. / N.O. Action Position


[External mounting]

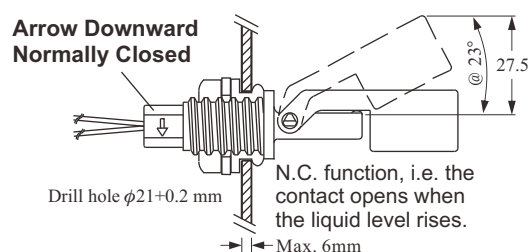


■ Standard FC H21PDD (Hexagon)

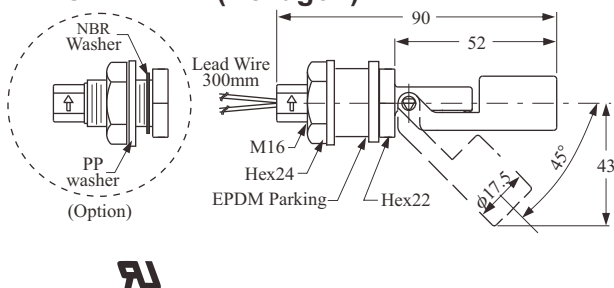


[Internal mounting]

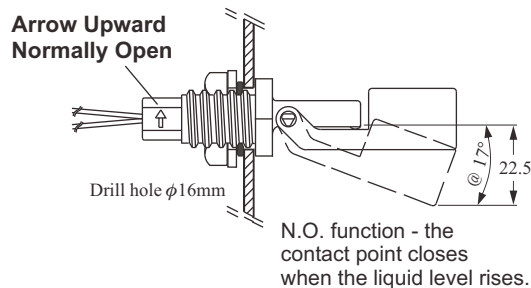

■ FC H31PD

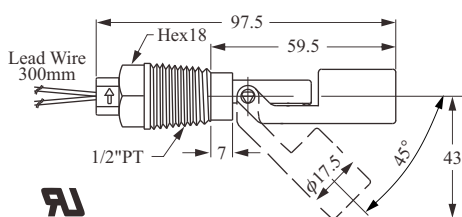

[External mounting]

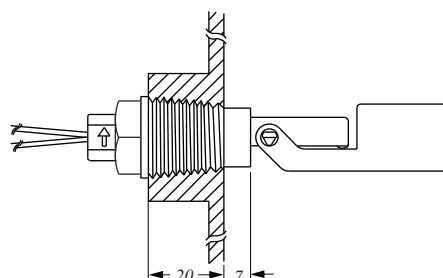


PLASTIC OH MODELS


► FC H41PD / H51PD




■ FC H41PD

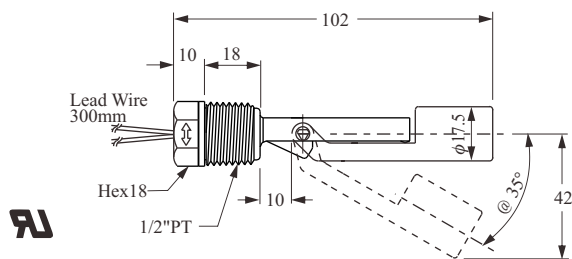

■ FC H51PD

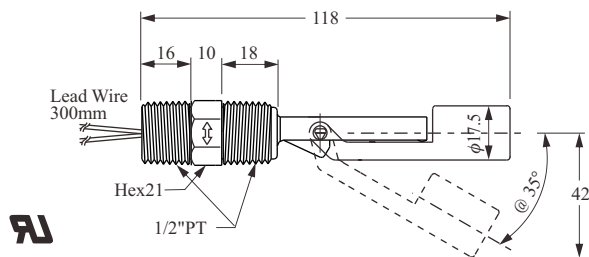



■ FC H61PD

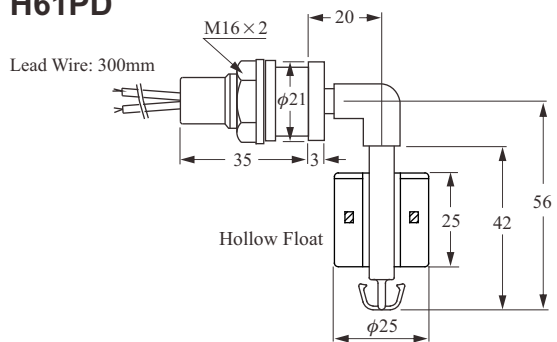


■ SPECIFICATIONS

Type	Material	Switching Capacity Max.	Switching Voltage Max.	Switching Current Max.	Carry Current Max.	Lead Wire	Max. Pressure	Operating Temp.	Suitable Sp. Gr.	Weight
FCH41PD	PP	50W/SPST	240Vac 200Vdc	0.5A	1A	XLPE	4 kg/cm ²	-20~80°C	0.55	20g
FCH51PD										25g
FCH61PD					PVC	31g				

■ Installation / N.C. / N.O. Action Position

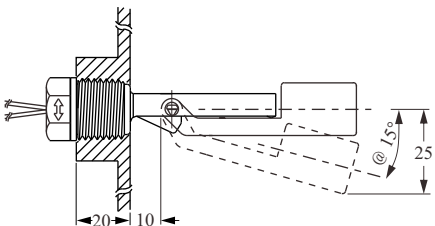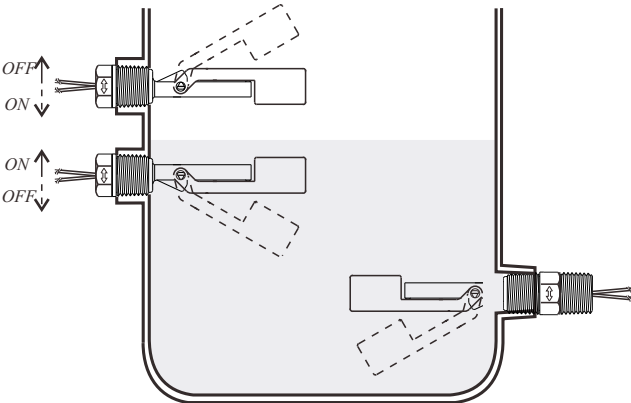


N.O. function, i.e. the contact closes when the liquid level rises.

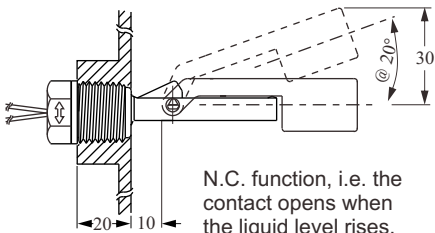

N.C. function, i.e. the contact opens when the liquid level rises.


PLASTIC OV MODELS

► FC V11QF

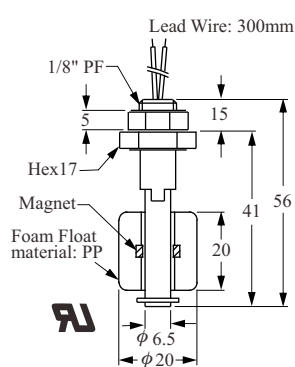


Washer: NBR
Drill hole ϕ10mm

► FC V21QD

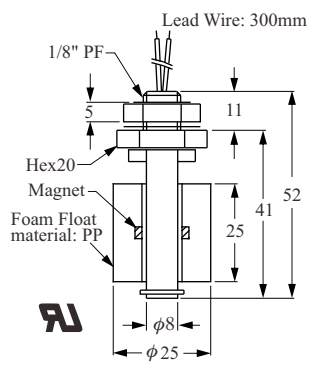


Washer: NBR
Drill hole ϕ10mm

► FC V31PD

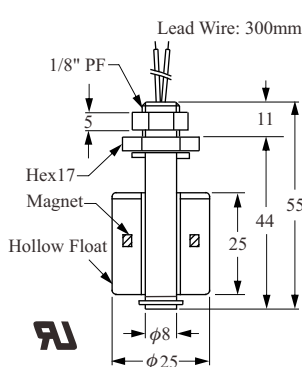

O-ring: VITON
Drill hole ϕ10mm

► FC V33FD, 34YD, 35GD

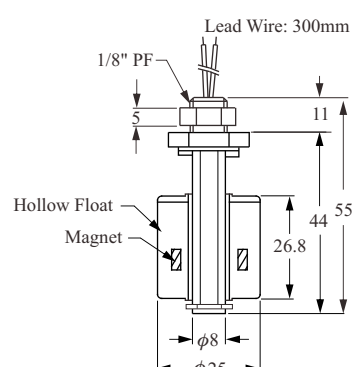


O-ring: VITON
Drill hole ϕ10mm

■ SPECIFICATIONS

Description \ Type	FC V11QF	FC V21QD	FC V31PD	FC V33FD	FC V34YD	FC V35GD
Switching Capacity Max.	10W SPST	50W SPST	50W SPST			
Switching Voltage Max.	125Vac	240Vac / 200Vdc	240Vac / 200Vdc			
Switching Current Max. (A)	0.5A		0.5A			
Carry Current Max. (A)	1A		1A			
Lead Wire	UL 1007 AWG22 PVC		UL 1007 AWG22 PVC	XLPE AWG22		
Reversible Switch Action	YES/ 80°C down					
Max. Pressure (Kg/cm ²)	ATM		4 kg/cm ²	2 kg/cm ²		
Operating Temperature	-20~80°C		-20~80°C	-20~120°C		
Material	PP		PP	PVDF	Nylon	Polysuphone
Suitable Specific Gravity	0.75	0.7	0.55	0.85	0.8	0.75
Weight (g)	12 g	18 g	12.8 g	18 g	15 g	18 g


PLASTIC OV MODELS

► FC V11NF

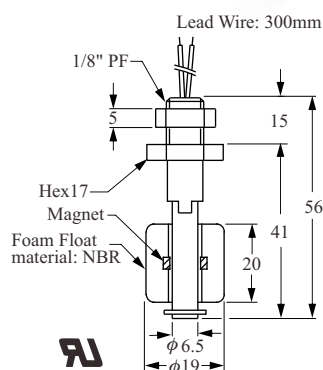



Washer: NBR
Drill hole φ10mm

► FC V81PD

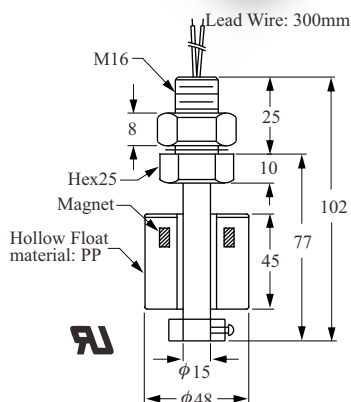



Washer: NBR
Drill hole φ16mm

► FC V41PD, V41QD

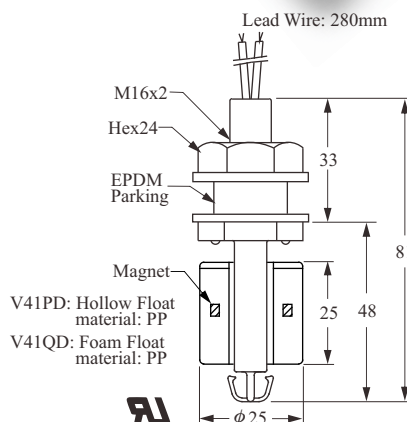


Washer: NBR
Drill hole φ16mm

► FC V41ND

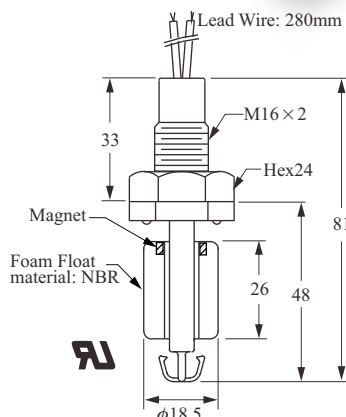


Washer: NBR
Drill hole φ16mm

► FC V61PF, V61NF

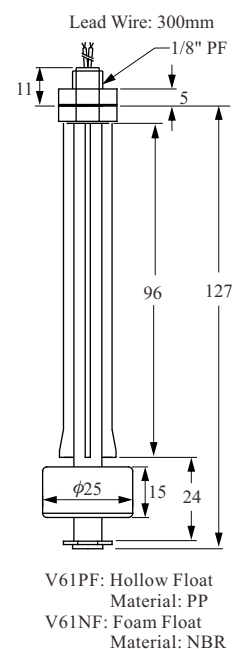

Washer: NBR
Drill hole φ10mm

► FC V51PD

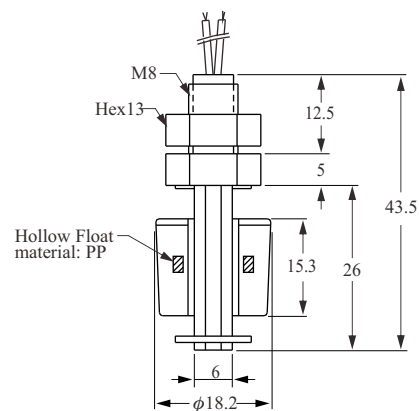


O-Ring: VITON
Drill hole φ8.5mm

PLASTIC OV MODELS

■ SPECIFICATIONS

Type Description	FC V11NF	FC V61PF FC V61NF	FC V41PD FC V41QD	FC V81PD	FC V41ND	FC V51PD
Switching Capacity Max.	10W SPST		50W SPST			
Switching Voltage Max.	125Vac (Break Down 250Vac)		240Vac / 200Vdc			
Switching Current Max. (A)	0.5A					
Carry Current Max. (A)	1A —					
Lead Wire	XLPE AWG22	UL 1007 AWG22 PVC				
Reversible Switch Action	NO	NO	YES	NO	NO	NO
Max. Pressure (kg/cm ²)	ATM	V61P: 4kg/cm ² V61N: ATM	V41P: 4kg/cm ² V41Q: ATM	4 kg/cm ²	ATM	4 kg/cm ²
Operating Temperature	-20~80°C					80°C
Material	PP (except V11N, V61N, V41N: NBR float)					
Suitable Specific Gravity	0.55	0.65	0.55	0.6	0.7	0.8
		0.5	0.7			
Weight (g)	11 g	16 g	23 g	180 g	17 g	8.2 g

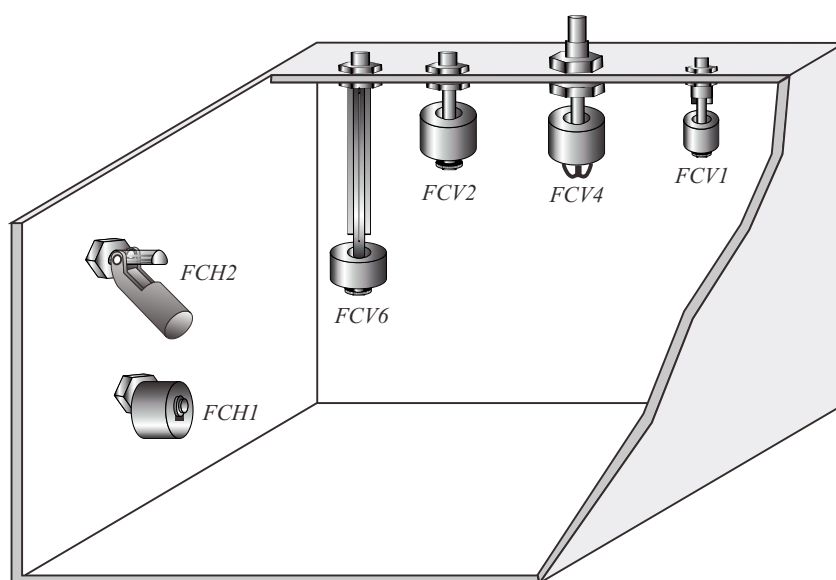


HOW TO ORDER PLASTIC OH/OV MODELS

	FC	V	2	3	F	D	A	(	0	5	)	P
Order No./ Model												
FC H1~H6 Side Mounting												
FC V1~V9 Top or bottom Mounting												
Material of Wetted parts												
1 : PP	5 : Polysuphone											
3 : PVDF	6 : PPS											
4 : Nylon												
Material of Float												
F : PVDF	P : PP (hollow) K : PPS											
N : NBR	Q : PP (foam)											
G : Polysuphone	Y : Nylon											
(Unsuitable for immersion in water for long persisting periods)												
Switching Capacity Max.												
D : 50W 240Vac /200Vdc SPST												
F : 10W 125Vac SPST												
K : 20W 150Vac/200Vdc SPDT												
Contact mode												
A : Normally Open (N.O.) SPST												
B : Normally Closed (N.C.) SPST												
D : NC Reversible												
E : NO Reversible												
※FCV11□DD & FCV11□DE are unavailable for reversible option.												
※Side mounted types are only available with D mode.												
Lead wire Length (Unit=100mm)												
05: 500mm (below 500mm)	※ 500mm per Unit											
10: 1000mm (501~1000)	※ 300mm (Standard length)											
15: 1500mm (1001~1500)												
⋮												
Material of Lead wire												
B: PVC (80°C)	---- AWG24											
C: PVC cable (80°C)	---- AWG22 X ϕ4											
D: XLPVC (105°C)	---- AWG24											
F : SILICON cable (150°C)	---- AWG24 X ϕ4											
P: PVC (80°C)	---- AWG22											
T: TEFLON (200°C)	---- AWG24											
X: XLPE (125°C)	---- AWG22											
S: Others	※ For FCH61, cable length could be selected, but material can't.											


※ "A" (Normally Open, SPST) is our standard specified switch. For further details about the lead wire please refer pages 6, 7, 9, 10 and 12.

CUSTOMIZED PLASTIC MODELS


► FC PV1

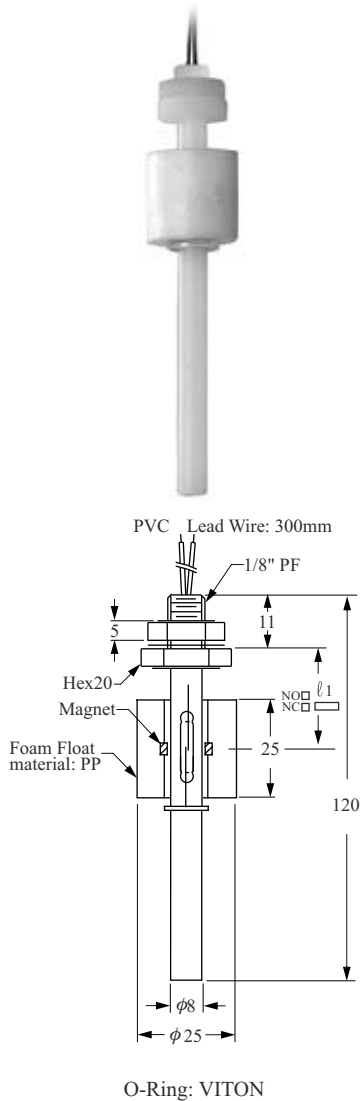

► FC PV2

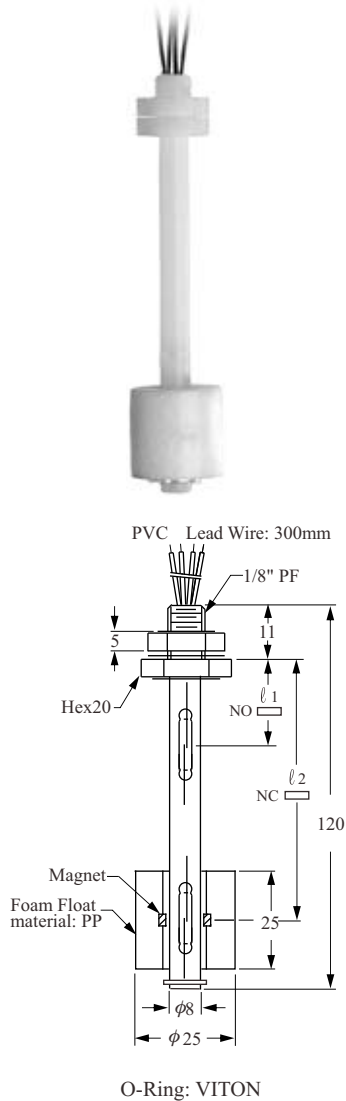

► FC PV3

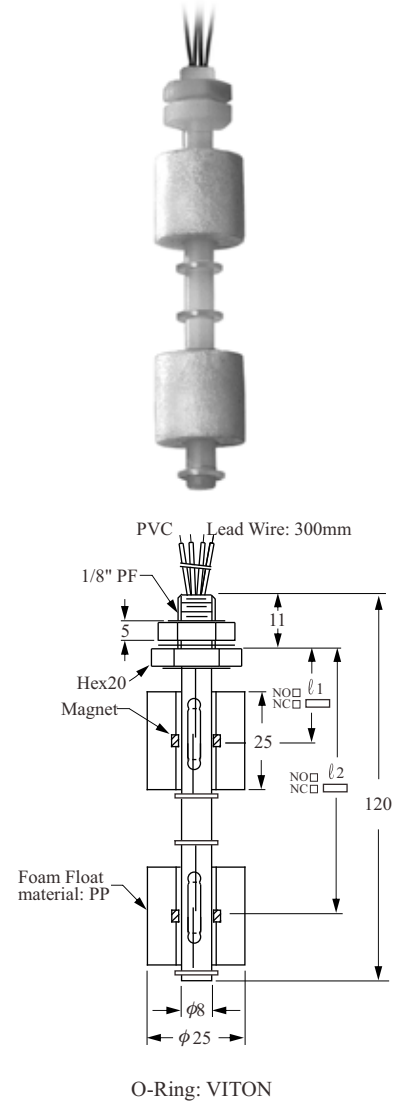

● NOTE: Float material's are optional.

The above items are custom-built when client demands are unique. The benefits are listed below:

- FCPV1 One float for one level activation.
- FCPV2 One float with 2 reed switches.
- Applicable for conditions where 1 float can actuate switches at high and low levels.
- FCPV3 Two floats actuate two independent reed switches: Each float unit's default setting can be either N.O. or N.C. as per cus

HOW TO ORDER PLASTIC SWITCHES

FC **PV1** **2** **D** **A** (**05** **P**)

Order No./ Model

PV1: Vertical Mounting, Single Float Single Switch

PV2: Vertical Mounting, Single Float Dual Switch

PV3: Vertical Mounting, Dual Float Dual Switch

Material of Wetted parts

1: PP; Lead wire---PVC---Temp. 80°C

2: NBR (only float); Lead wire---PVC---Temp. 60°C
Lead wire---XLPE---Temp. 100°C

3: PVDF; Lead wire---XLPE---Temp. 125°C

4: Nylon; Lead wire---XLPE---Temp. 125°C
(Unsuitable for immersion in water for long persisting periods)

Switching Capacity Max.

D: 50W 240Vac /200Vdc SPST 

F: 10W 125Vac SPST

K: 20W 150Vac/200Vdc SPDT

Contact Mode

A: Normally Open (N.O.) SPST

B: Normally Closed (N.C.) SPST

C: SPDT

F: 1 float 2 points.

H: 1-N.O.,1-N.C.(2 floats)

Lead wire Length (Unit=100mm)

05: 500mm (below 500mm) ※ 500mm per Unit

10: 1000mm (501~1000mm) ※ 300mm (Standard length)

15: 1500mm (1001~1500mm)

⋮

Material of Lead wire

C: PVC cable (80°C) ---- AWG22 X $\phi 4$

P: PVC (80°C) ---- AWG22 (Standard)


X: XLPE (125°C) ---- AWG22

CUSTOMIZED PLASTIC MODELS

Items below are custom-built models for special applications or placement on existing facilities. Their unique characteristics are as follows:


- Any size measuring range, but $\phi 8\text{mm}$ stem Max. 500mm.
- Customized mounting thread specifications are acceptable.
- Single or multiple contact points are workable.
- Switch activation N.O. or N.C. choices are available.

► FDSA□11

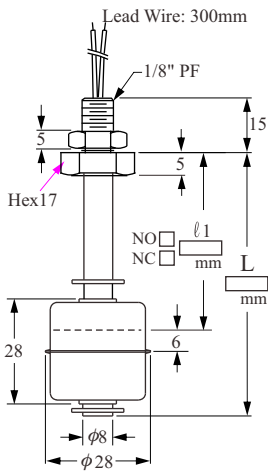


Washer: NBR

► FDSB□11

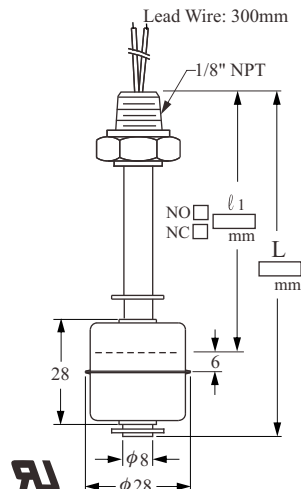


Washer: NBR

► FDSC□11

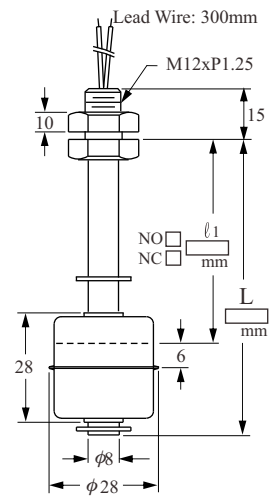


Washer: NBR

► FDSA□12

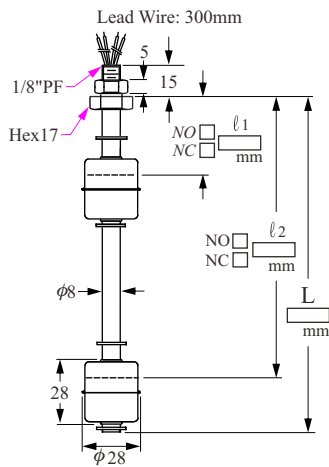


Washer: NBR

► FDSA□21

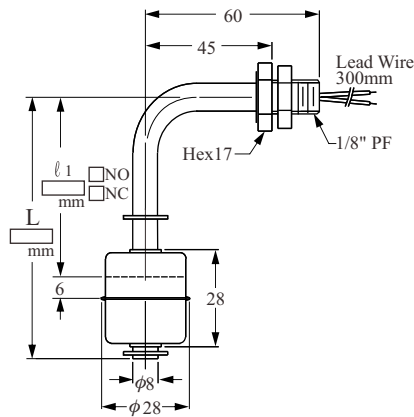

Washer: NBR

► FDSA□22

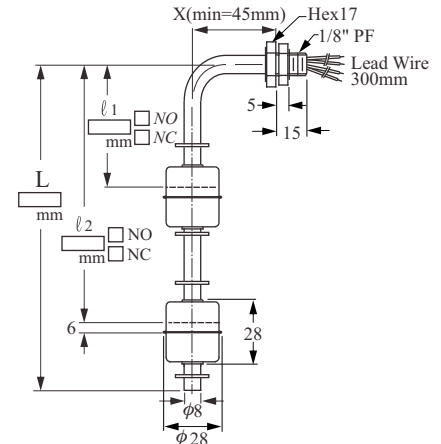


Washer: NBR

CUSTOMIZED STAINLESS STEEL MODELS


Items below are custom-built models for special application and location on existing equipment facilities. Their unique characteristics are as follows:

- Any size measurement range available.
- Customized mounting thread specification are acceptable.
- Single or multiple contact form (point) are workable.
- Switch activation N.O. or N.C. are available.


► FDSD□11

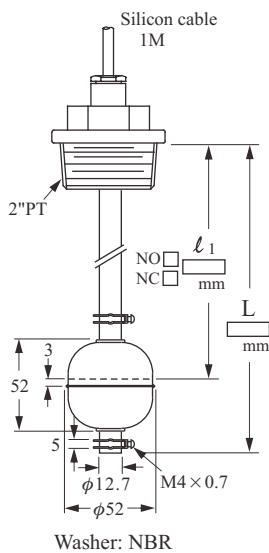


► FDSE□11

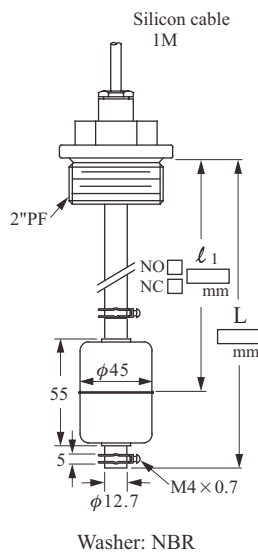


► FDSF□11

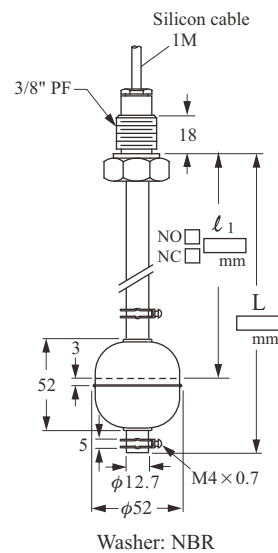


► FD4503D

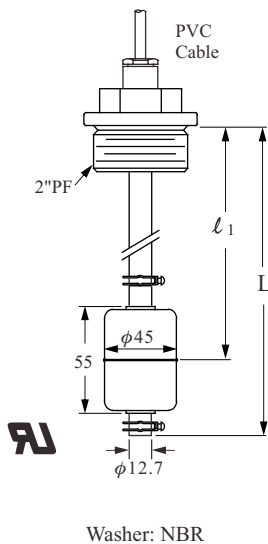

► FD5003G

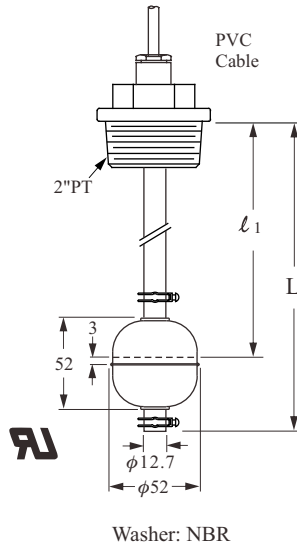

► FD7503G


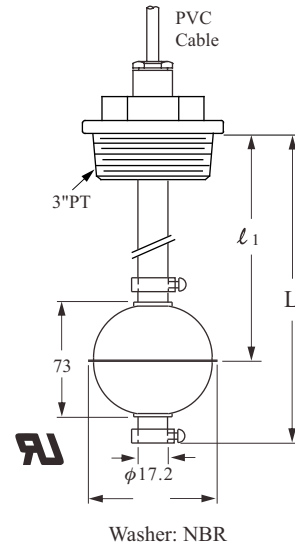


HOW TO ORDER CUSTOMIZED STAINLESS STEEL MODELS



Type	FD	S	A	6	1	2	D	A	0	5	
FDSA Float : RF-SA ϕ 28x28, Screw : 1/8"PF											
FDSB Float : RF-SB ϕ 28x28, Screw : 1/8"NPT											
FDSC Float : RF-SC ϕ 28x28, Screw : M12											
FDSD Float : RF-SD ϕ 52x52, Screw : 2"PT											
FDSE Float : RF-SE ϕ 45x55, Screw : 2"PF											
FDSF Float : RF-SF ϕ 52x52, Screw : 3/8"PF											
Material of Wetted parts											
0 : SUS304											
6 : SUS316											
Mounting											
1 : Top or Bottom Mourting											
2 : Side Mounting											
Float Number											
1~4 floats											
Switching Capacity Max.											
D: 50W 240Vac /200Vdc, SPST 											
G: 60W 220Vac, SPDT (only use for tube ϕ 12.7)											
K: 20W 150Vac /200Vdc, SPDT											
Contact Form											
A: Normal Open (N.O.) SPST F: 1 float 2 points											
B: Normal Close (N.C.) SPST H: 1-N.O., 1-N.C.(2 floats)											
C: 1AB SPDT											
Lead wire Length (Unit=100mm)											
03: 300mm (SA, SB, SC, Standard length) ※ 500mm per Unit											
05: 500mm (below 500mm)											
10: 1000mm (SD, SE, SF, Standard length)											
15: 1500mm (1001~1500mm)											
Material of Lead wire											
C: PVC cable (80°C) ---- AWG22 X 2C X ϕ 4											
F: SILICON cable (150°C) ---- AWG24 X 2C X ϕ 4											
P: PVC (80°C) ---- AWG22											
T: TEFLON (200°C) ---- AWG24											
X: XLPE (125°C) ---- AWG22 (Standard)											
											For SA, SB, SC Type

TYPICAL WIRING DIAGRAMS



* AUTO SUPPLY CASE:
SINGLE FLOAT DUAL SWITCHES

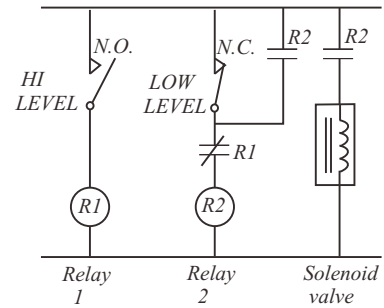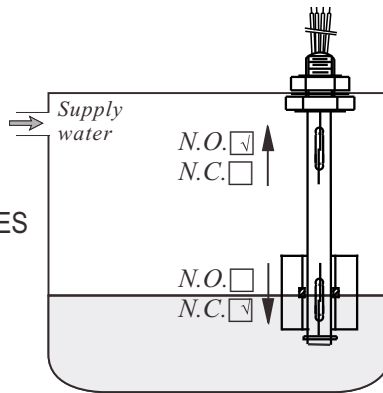

* AUTO DRAIN CASE:
SINGLE FLOAT DUAL SWITCHES

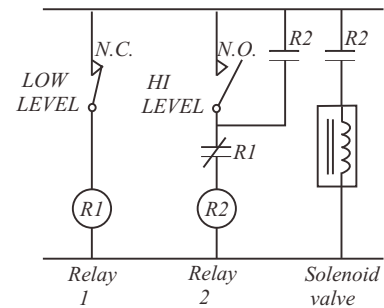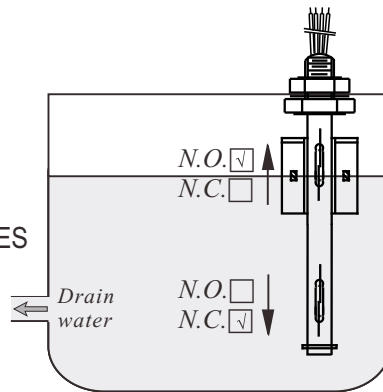

* AUTO SUPPLY CASE:
DUAL FLOATS DUAL SWITCHES

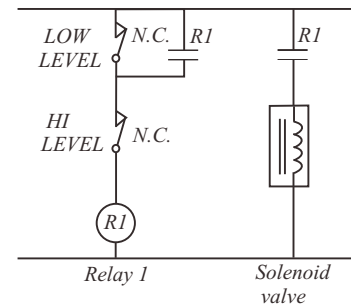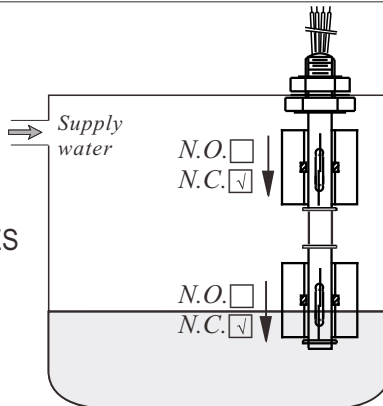

* AUTO DRAIN CASE:
DUAL FLOATS DUAL SWITCHES

